

DATA SHEET


Condor LED Beacon Range

sentinel
vehicle lighting

Images



Dimensions

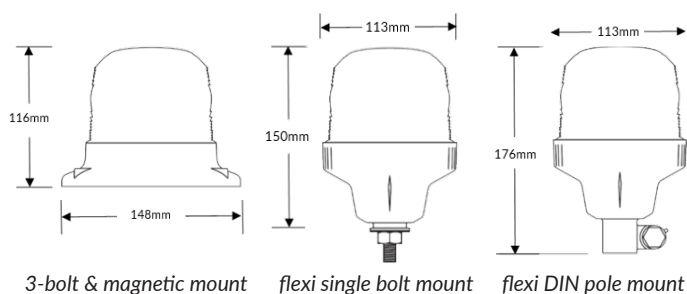

Replacement lens kits available for all Condor beacons



SL-49001
Amber

SL-49002
Red

SL-49003
Blue

SL-49004
Clear (White)

SL-49005
Green

Specifications

Function:	LED beacon
LEDs:	18 high-powered white diodes
Beacon colours:	Amber, red, blue, white, green
Certifications:	R65: E9 65R00/10 6645 00 (amber) R10: E9 10R06/01 22826 00
Voltage:	Dual voltage 12/24V
Operating range:	10-30Vdc
IP rating:	IP65
Operating temperature:	-30°C to +65°C
Mounting options:	3-bolt, magnetic, flexi single bolt & flexi DIN pole mount options available
Wiring:	Red = positive Black = ground (negative) Yellow = synchronisation
Flash pattern select:	Red button on PCB
Reverse polarity protection:	Yes
Warranty:	Limited lifetime warranty

Flash Pattern	Flash Rate	Output	Compliance
Double flash	126 flashes/min	100cd	R65 (amber)
Single flash	80 flashes/min	100cd	CAP168/ICAO
Double flash (dim)	126 flashes/min	50cd	
Single flash (dim)	80 flashes/min	50cd	
Steady on		50cd	

Part numbers

CONDOR	Amber (R65)	Red	Blue	White	Green
3-bolt mount	SL-41511	SL-41512	SL-41513	SL-41514	SL-41515
Magnetic mount	SL-41521	SL-41522	SL-41523	SL-41524	SL-41525
Single bolt mount	SL-41531	SL-41532	SL-41533	SL-41534	SL-41535
DIN pole mount	SL-41541	SL-41542	SL-41543	SL-41544	SL-41545

Materials

Lens:	Impact & UV resistant polycarbonate	
Base:	3-bolt:	ABS
	Magnetic mount:	ABS
	Flexi single bolt:	polypropylene
	Flexi DIN pole:	polypropylene