

DATA SHEET


SL-1040X series
LED directional



Images



Dimensions

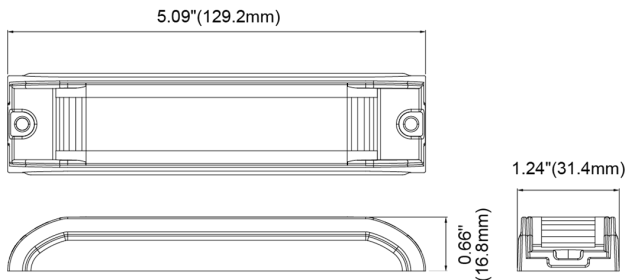

Specifications

- Functions:** LED directional R65
Side optic for wide angle for 180° visibility
Low-profile design
- LEDs:** 6 x high-power diodes
- Lens colour:** Clear
- Flash pattern:** 15 selectable flash patterns
Multiple units can be synchronised to flash simultaneously or alternately
- Certifications:** ECE Reg 10 E6-10R-040466
ECE Reg 65: XA1 E6 R65 000070 amber
XB1 E6 R65 000071 blue
- Voltage:** Dual voltage 12/24Vdc
- Operating range:** 10 to 30VDC
- IP rating:** IP68
- Operating temperature:** -30°C to +65°C
- Mounting:** Surface mount
- Wiring:** Co-extruded 4-core cable, 25cm long, insulated wires 20AWG
Red = power
Black = ground
Yellow = synchronisation and flash patterns
White = alternating flash
- Power rating:** Average = 6W
- Average current draw:** 0.50A @ 12VDC / 0.25A @ 24VDC
- Maximum current draw:** 1.00A @12VDC / 0.50A @24VDC
- Reverse polarity protection:** Yes
- Warranty:** 3 years

Part numbers

SL-10401	LED directional R65- amber
SL-10403	LED directional R65- blue
SL-10404	LED directional - white



Materials

- Lens:** Polycarbonate
- Base:** Aluminum die cast housing, black E-coat finish